





Pherocon[®] IC

Assembly Instructions



TRAP ASSEMBLY INSTRUCTIONS

1. Remove one folded top section, one folded bottom section (with grid and glue on inside surface), two spacers, one wire hanger, and one lure packet from the kit box. If using Pherocon L2 lures, also remove one lure holder.
2. Open top section and fold outer triangle-shaped areas inward (toward the side without printing). Crease fold along score marks by folding top section until flat. Allow top section to open naturally to form correct shape as shown. Follow these same steps and fold the glue-coated bottom section inward (toward the glue-coated side). Be sure the front edges are straight, not bowed.
3. Place one Pherocon lure directly in the center of bottom section. Or, if using Pherocon L2 lures, insert L2 lure into Hole A in the lure holder and secure firmly.
4. Straighten wire hanger and insert ends through Holes B and C in top section. Weave wire ends through Holes D and E from the inside. Push wire hanger all the way through until it is resting on top of the trap.
5. Slide one spacer on each wire end until it is held between the wire and the side panel. If using Pherocon L2 lures, also slide the lure holder on one wire end through Hole F and position lure in the center of the trap.
6. Insert ends of wire hanger into Holes G and H in bottom section. Weave wire ends through Holes I and J from inside.
7. Push top and bottom section together so that spacers are also held between the wires and the side panels. Bend ends of the wire inward and under the trap.
8. To hang the trap in a tree, wrap braided portion of the wire securely around tree limb.
9. Place trap in orchard according to location and density recommendations.

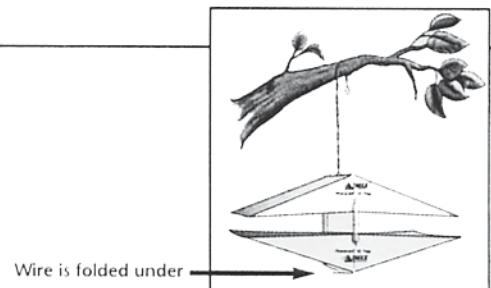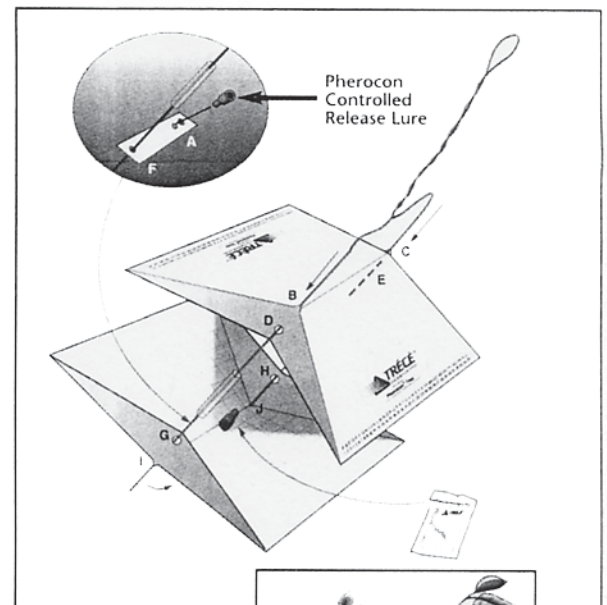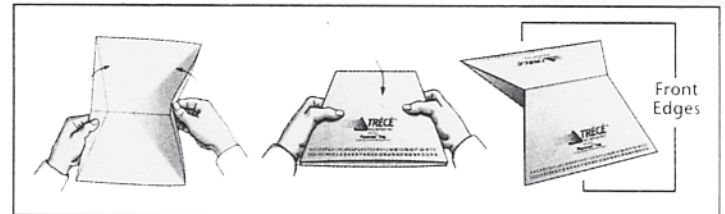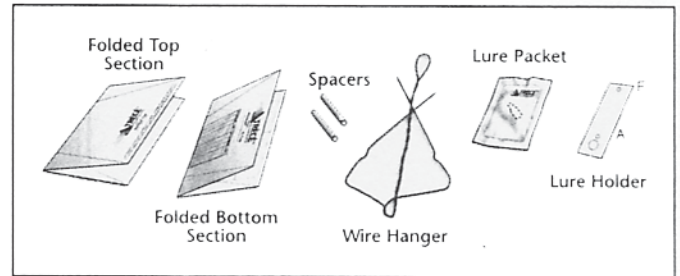

Distributed by:
Great Lakes IPM, Inc.
10220 Church Rd NE
Vestaburg MI 48891

989-268-5693
989-268-5911
FAX: 989-268-5311

www.greatlakesipm.com
E-mail: glipm@greatlakesipm.com